

LE-R3104 / LE-R3108 / LE-R3116
(4CH, 8CH / 16CH DVR)



Digital Security System

PERFORMANCE & RELIABILITY



H.264



Feature :


- VGA output resolution is 1280 x 1024
- 4channel D1 real-time machine supports video playback at the same time all the way real-time D1
- 8-way machine to support non-real-time D1 video recording mode, frame rate to 12 frames per channel
- Built-in server name, No need registration and forwarding.
- CMS support 256ch view
- Support 5 mobile OS: Windows Mobile, Symbian, iPhone, Blackberry, Android.
- Each DVR support 16 users viewing at same time





LE-R3104 / LE-R3108 / LE-R3116
(4CH, 8CH / 16CH DVR)

FRONT VIEW

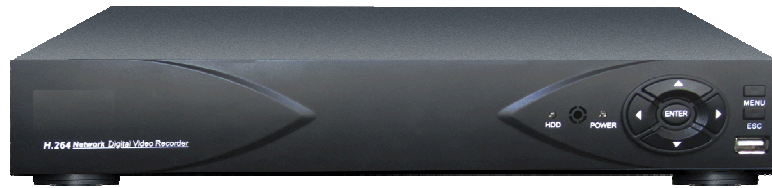

FUNCTIONAL SPECIFICATIONS

MODEL	LE-R3104	LE-R3108	LE-R3116
Channel & Compression	4CH H.264	8CH H.264	16CH H.264
Video Format	NTSC / PAL		
Video Input	BNC X 4 (1.0Vp-p/75Ω)	BNC X 8 (1.0Vp-p/75Ω)	BNC X 16 (1.0Vp-p/75Ω)
Video Output	BNC X 1 (1.0Vp-p/75Ω), VGA X 1		BNC X 1 (1.0Vp-p/75Ω), HDMI X 1, YPbPr X 1
Matrix Output	NA		BNC X 1 (1.0Vp-p/75Ω)
HPbPr Output Resolution	NA		1920 X 1080i50 / 1920 X 1080i60
VGA Output Resolution	1280 X 1024		
D1 Record Frame Rate	(PAL)100fps/(NTSC)120fps		
CIF Record Frame Rate	(PAL)100fps/(NTSC)120fps	(PAL)200fps/(NTSC)240fps	(PAL)400fps/(NTSC)480fps
DI Playback Frame Rate	(PAL) 4CH X 25fps (NTSC) 4CH X 30fps	(PAL) 8CH X 12fps (NTSC) 8CH X 15fps	(PAL) 16CH X 6fps (NTSC) 16CH X 7fps
CIF Playback Frame Rate	(PAL) 4CH X 25fps (NTSC) 4CH X 30fps	(PAL) 8CH X 25fps (NTSC) 8CH X 30fps	(PAL) 16CH X 25fps (NTSC) 16CH X 30fps
Network Resolution/fps	CIF>10fps Each Channel		
Audio	RCA X 4 CH input, RCA X 1 output		
Alarm Input	4CH		
Alarm Trigger	Disk Full alarm, Motion Detection Alarm, Video Loss Alarm		
Record Mode	Manual / Timing / Motion Detection		
Remote Control	100M RJ-45		
USB-port	Two USB 2.0 House		
Hard Disk	1 X 2TB		
PTZ	RS485 Interface		
Power	12V 3A		12V 5A
Power Supply	<15W		
Operation Temp.	-10℃ - +50℃		
Operation Humidity	10% - 90%		
Weight	About 3kg (including Packaging)		
Dimensions	338(L) × 250(W) × 103(H)mm		

The above specification can be changed without previous notice for improvement of product.

Lifecom Technologies (HK) Co., Ltd.

Tel. : 3589 6755 Fax: 3427 3318 E-mail: info@lifecomhk.com Web-Site: www.lifecomhk.com